




italtec

Company with Quality
System Certified by DNV
ISO 9001/2000

E.M.M.S. 0,3 KW POWER SUPPLY MODULE

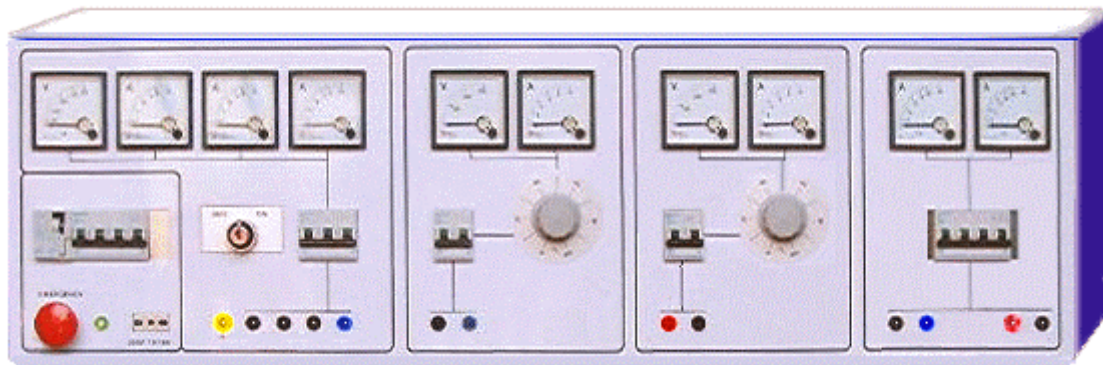

MOD.3000

Universal power supply

It is used for electrical supply of all EMMS machines, brakes and accessories.
Excitation voltage and magnetic brake supply are also included.

- Power requirements: 400V 3PH+N+G;
- General protection with high sensitivity magneto thermal differential (0,03A) automatic circuit breaker.
- Mushroom emergency push-button;
- Ground terminal and key consent for all other outputs
- All outputs are protected by means of automatic magneto thermal circuit breaker.

OUTPUTS:

- 1 universal single-phase safety socket 10/16A;
- 3 phase adjustable output: 0-430V 1A;
L1, L2, L3, N, G
Protection with magneto thermal automatic circuit breaker.
1 x A.C. voltmeter
3 x A.C. ammeters inserted on each phase;

- Single phase adjustable output: 0-230V 2A;
Protection with magneto thermal automatic circuit breaker.
1 x A.C. voltmeter;
1 x A.C. ammeter;
- DC variable output 0-220V, 1A;
Protection with magneto thermal automatic circuit breaker.
1 x D.C. voltmeter;
1 x D.C. ammeter;
- Single phase fixed output: 230V A.C. 16A
Protection with magneto thermal automatic circuit breaker.
1 x A.C. ammeter;
- D.C. fixed output: 220V D.C. , 3A
Protection with magneto thermal automatic circuit breaker.
1 x D.C. ammeter;

Dim LxWxH: 100x36x36cm;
Weight: 38kg;

Copyright © italtec s.r.l. All Rights Reserved

Ci riserviamo di apportare modifiche e migliorie senza preavviso
We reserve the right to change these specifications without notice
Photos et données techniques susceptibles de modifications sans avis

ITALTEC S.R.L. SISTEMI TECNICI DIDATTICI
20090 FIZZONASCO MI (Italy) – Via privata Liguria, 3
Tel. +39 02-90.721.606 Fax. +39-02-90.720.227
e-mail: italtec@italtec.it <http://www.italtec.it>